


PARAMETERS

Impedance	4 ohms
Re	3.04 ohms
Le	0.03 mH
Fs	1619 Hz
Qms	3.77
Qes	1.91
Qts	1.27
Mms	N/A
Cms	N/A
Sd	N/A
Vd	N/A
BL	N/A
Vas	N/A
Xmax	N/A
VC Diameter	25.4 mm
SPL	96.5 dB 2.83V/1m
RMS Power Handling	30 watts
Usable Frequency Range (Hz)	3,000 - 20,000 Hz


IMPEDANCE/PHASE

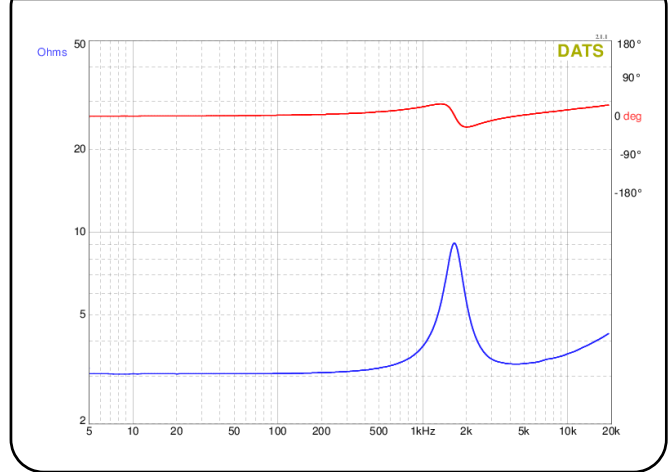

FEATURES

- Ultra-high sensitivity 96dB from 3 kHz to 20 kHz
- Exceptionally flat treble response for accurate high frequency reproduction
- High-strength neodymium motor provides low distortion
- 1" silk diaphragm for remarkable clarity and great off-axis response
- 1" diameter voice coil for excellent power handling
- All hardware included to permit flush or surface mounting

FREQUENCY RESPONSE

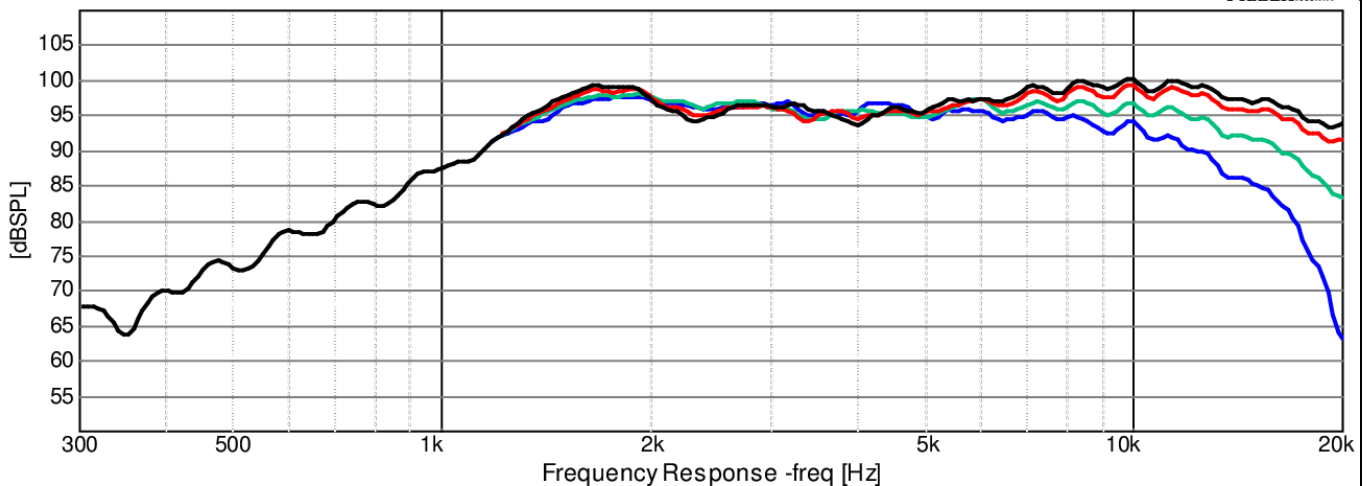

OmniMic

Note: 1/24th octave smoothing - nearfield response included in graph below 450 Hz.

Black = 0°
Red = 15°
Green = 30°
Blue = 45°